


Styrene, Xylenes

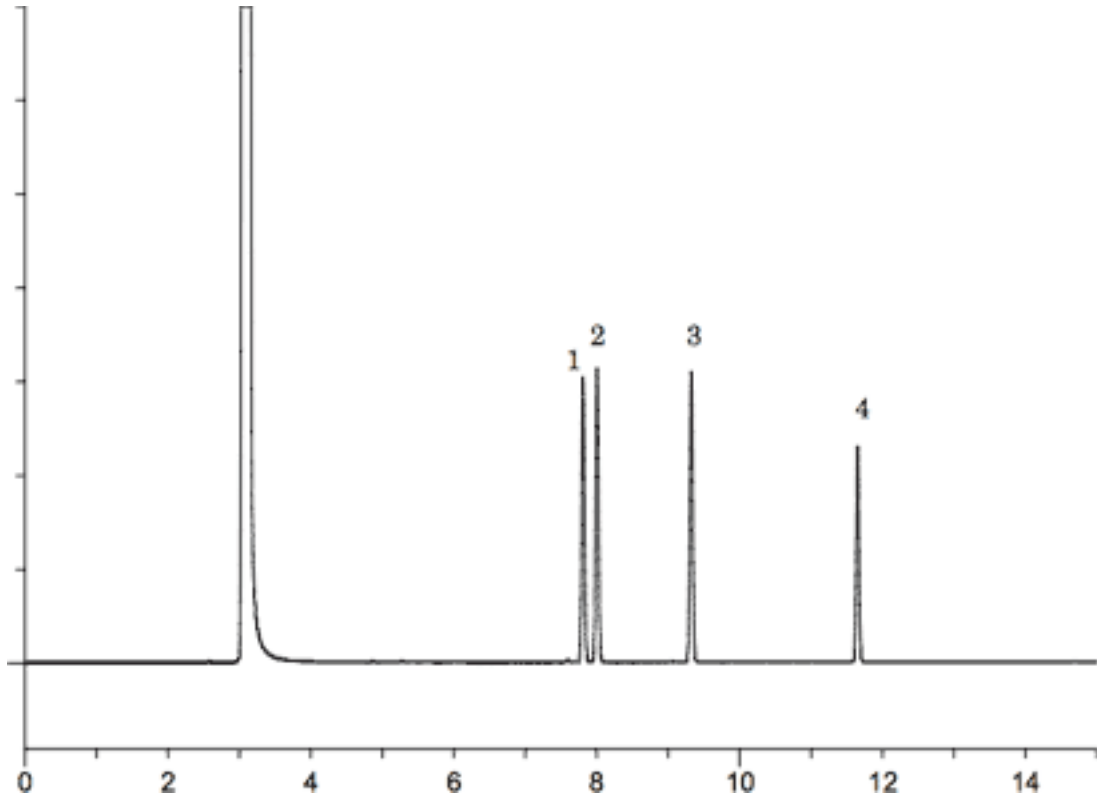

System : GC/FID
 Column : InertCap Pure-WAX
 0.25mmI.D. × 30m df=0.25µm
 Column Temp. : 50°C(5min)→5°C/min→200°C
 Carrier Gas : He 100kPa
 Injection : Split 1 : 50 0.2µl
 250°C
 Detection : FID Range 10⁰
 260°C
 Sample : Styrene, Xylenes
 1000mg/l Solvent : Methanol

Solutes : 1. p-Xylene
 2. m-Xylene
 3. o-Xylene
 4. Styrene