


Free fatty acids

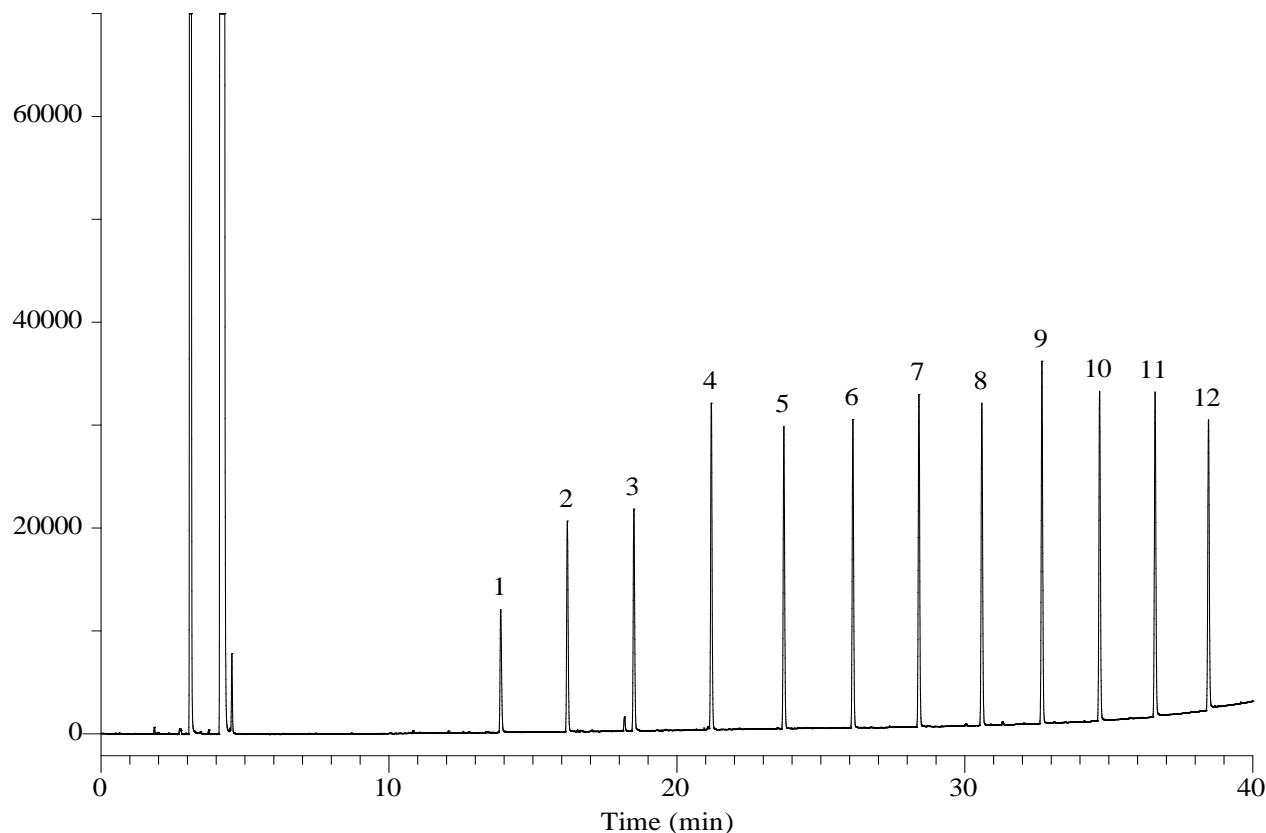

Conditions

System : GC/FID
Column : InertCap Pure-WAX
 0.25 mm I.D. x 30 m df = 0.25 µm
Col. Cat. No. : 1010-68142
Col. Temp. : 40 °C - 5 °C/min - 240 °C
Carrier Gas : 100 kPa
Injection : Split flow 50 mL/min
 240 °C
Detection : FID Range 10⁰
 240 °C
Sample Size : 200 mg/L in Dichloromethane
 1.0 µL

Analyte : 1. Acetic acid
 2. Propionic acid
 3. Butyric acid
 4. Valeric acid
 5. Capronic acid
 6. Enanthic acid
 7. Caprylic acid
 8. Pelargonic acid
 9. Capric acid
 10. Undecylic acid
 11. Lauric acid
 12. Tridecylic acid