


Siloxane

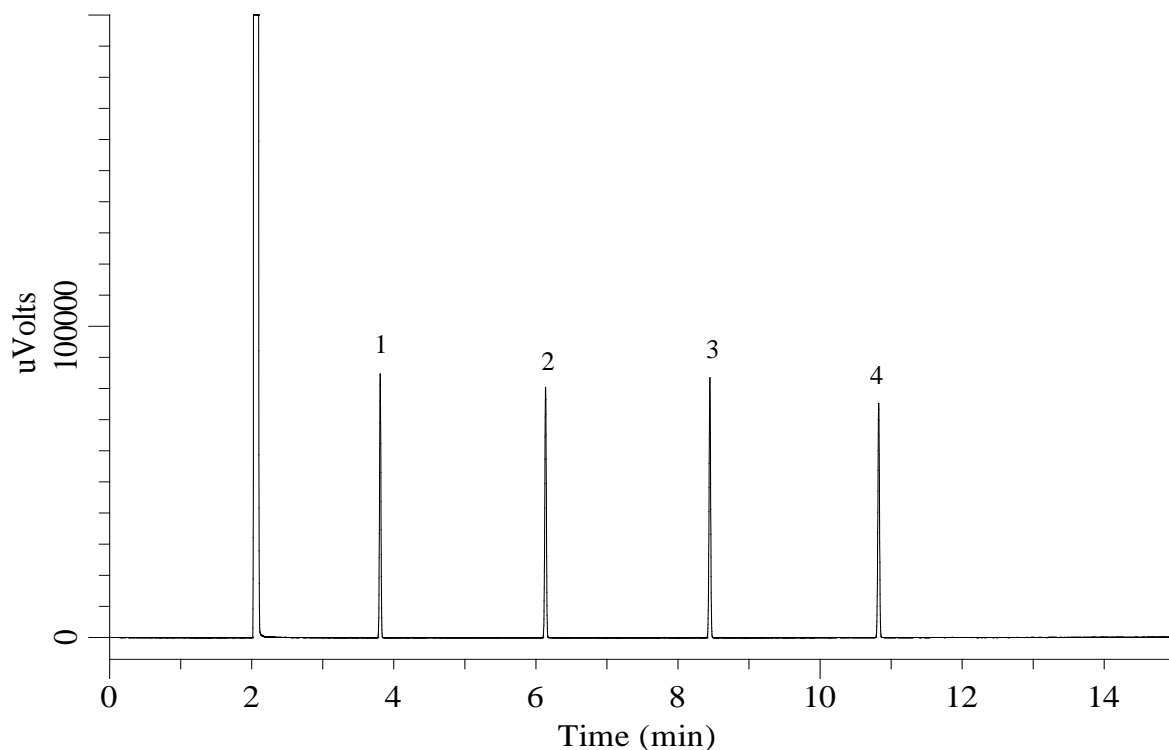

Conditions

- System** : GC-FID
Column : InertCap 1
 0.25 mm I.D. x 30 m df = 0.25 μ m
Col. Cat. No. : 1010-11142
Col. Temp. : 60 °C (1 min hold) - 10 °C/min - 280 °C
Carrier Gas : He 1 mL/min
Injection : Split flow 50 mL/min
 250 °C
Detection : FID Auto Range
 280 °C
Sample Size : 1000 μ g/mL in Dichloromethane
 1.0 μ L
Analyte : 1. Hexamethyl cyclotrisiloxane(D3)
 2. Octamethyl cyclotetrasiloxane(D4)
 3. Decamethyl cyclopentasiloxane(D5)
 4. Dodecamethyl cyclohexasiloxane(D6)