


Analysis of Phenyl methyl dimethyl silicone

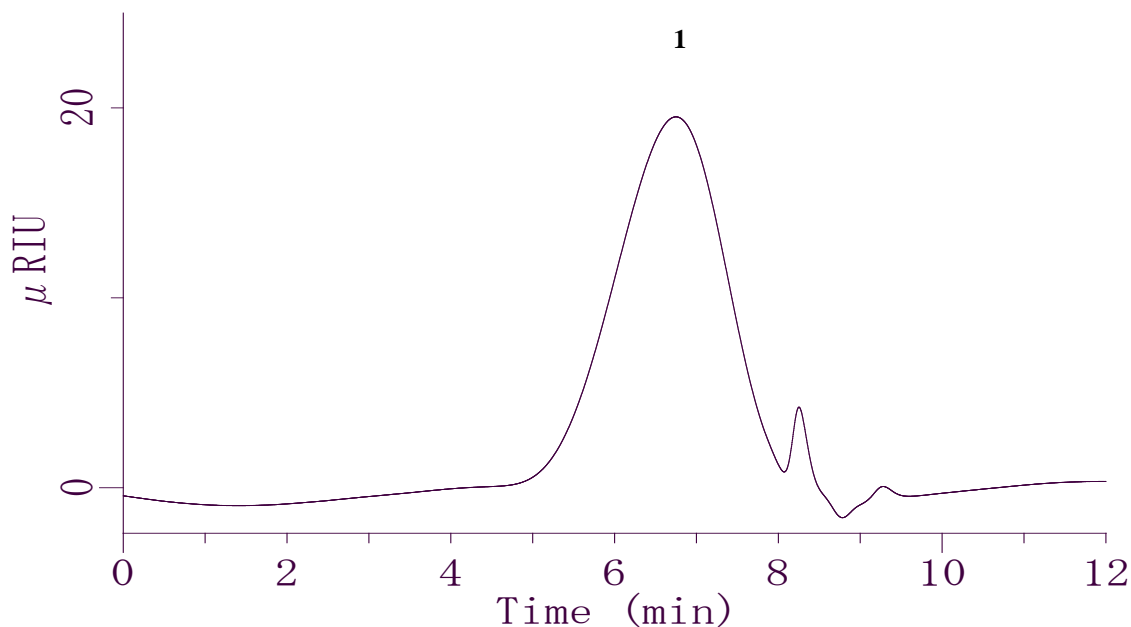

Conditions

System : GL7400 HPLC system
Column : Inertsil WP300 Diol (5 μ m, 250 x 7.6 mm I.D.)
Column Cat. No. : 5020-05988
Eluent : THF
Flow Rate : 1.0 mL/min
Col. Temp. : 40°C
Detection : RI (GL-7454 RI Detector) (Cell Temp. 35°C)
Injection Vol. : 10 μ L

Analyte

1. Phenyl methyl dimethyl silicone