


Analysis of Sugars (Using of THF as mobile phase)

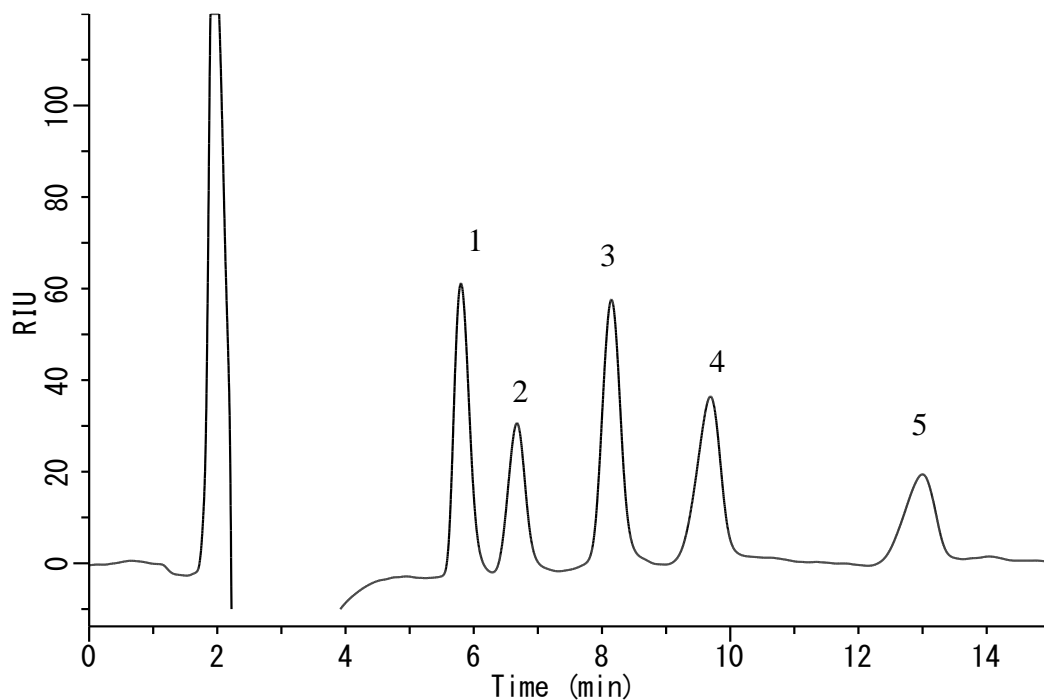

Conditions

System : GL-7400 system
Column : Inertsil NH2 (3 μ m, 150 \times 3.0 mm I.D.)
Column Cat. No. : 5020-05475
Eluent : A) THF
 B) H₂O
 A/B = 80/20, v/v
Flow rate : 0.4 mL/min.
Col. Temp. : 40 °C
Detection : RI(40°C, Positive) (GL-7454 RI detector)
Injection Vol. : 20 μ L

Analyte

1. Fructose	10000 mg/L
2. Glucose	10000 mg/L
3. Sucrose	10000 mg/L
4. Maltose	10000 mg/L
5. Lactose	10000 mg/L