


Analysis of components of coffee (Inertsil ODS-P)

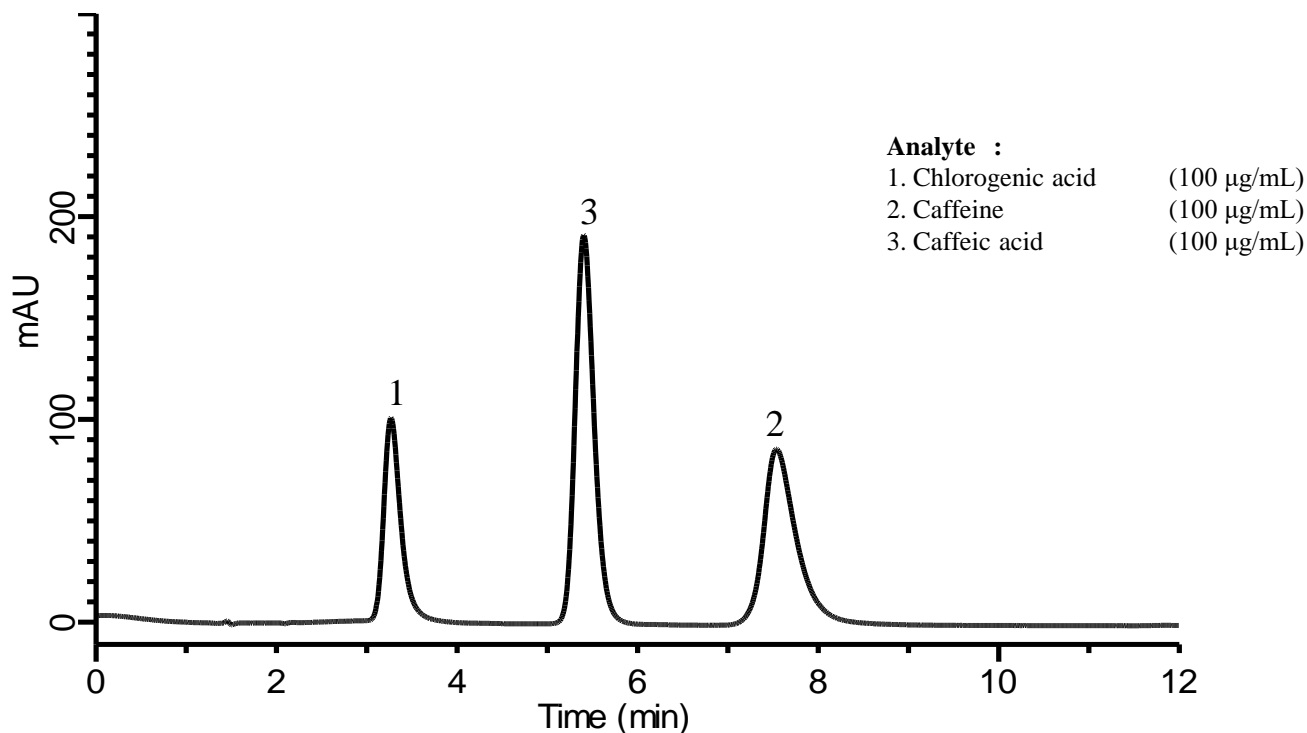

Conditions

System : GL-7400 HPLC system
Column : Inertsil ODS-P (5 µm, 150 x 4.6 mm I.D.)
Column Cat. No. : 5020-02001
Eluent : A) CH₃OH
 B) 5 mM KH₂PO₄ (pH 2.5, H₃PO₄)
 A/B = 30/70, v/v (Mixed by a gradient mixer)
Flow Rate : 1.0 mL/min
Col. Temp. : 40 °C
Detection : UV 280 nm (GL-7452A PDA Detector)
Injection Vol. : 10 µL
Sample : component of coffee