


Analysis of liner fatty acids (Monoclad C18-HS)

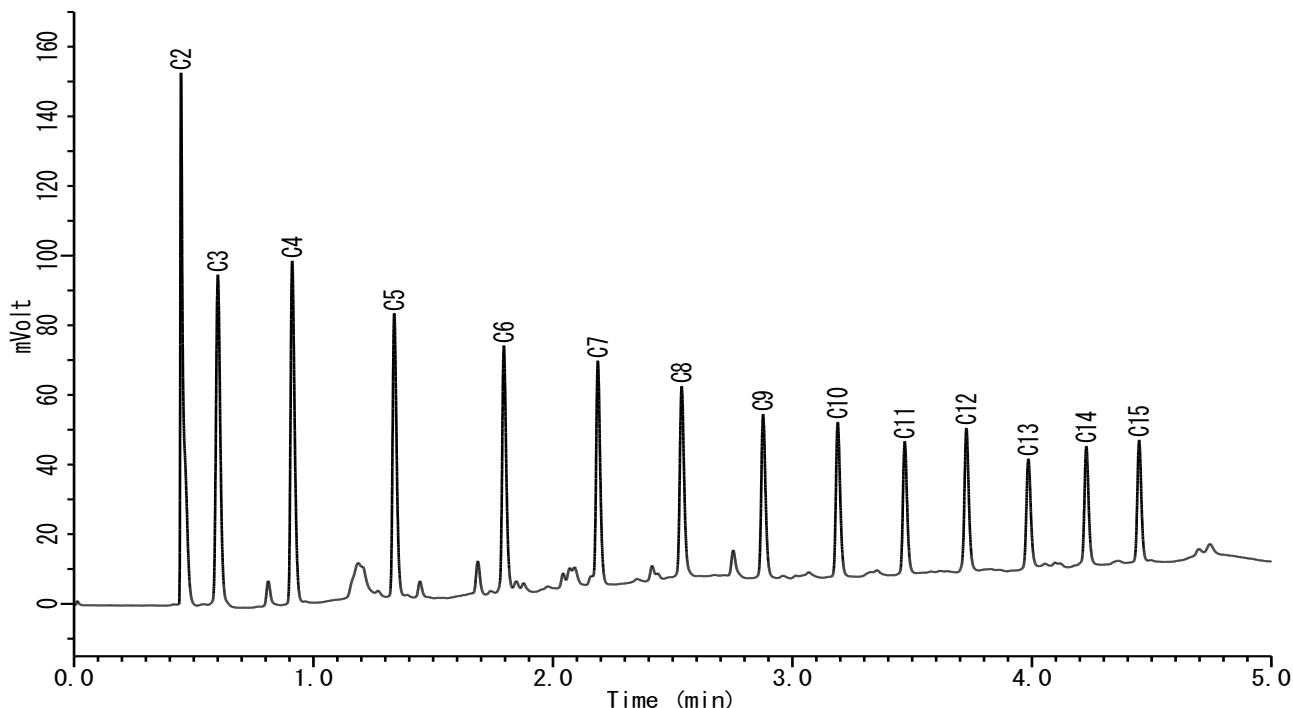

Conditions

System : LC800 HPLC system
Column : Monoclad C18-HS (100 x 3.0 mm I.D.)
Column Cat. No. : 5020-10802
Eluent : A) 0.1 % H₃PO₄ in CH₃CN
 : B) 0.1 % H₃PO₄ in H₂O
 : A/B = 10/90 -4 min- 90/10 -1 min- 90/10, v/v
 : (Mixed by a gradient mixer)
Flow Rate : 1.5 mL/min
Col. Temp. : 40 °C
Detection : UV 210 nm (LC800 UV Detector)
Injection Vol. : 1 µL
Sample : liner fatty acids (C2 - C15)

Analyte :

1. Acetic acid	(C2)
2. Propionic acid	(C3)
3. Butyric acid	(C4)
4. Valeric acid	(C5)
5. Caproic acid	(C6)
6. Enanthic acid	(C7)
7. Caprylic acid	(C8)
8. Pelargonic acid	(C9)
9. Capric acid	(C10)
10. Undecanoic acid	(C11)
11. Lauric acid	(C12)
12. Tridecanoic acid	(C13)
13. Myristic acid	(C14)
14. Pentadecanoic acid	(C15)

each 5 mg/mL