


Analysis of Estrogen

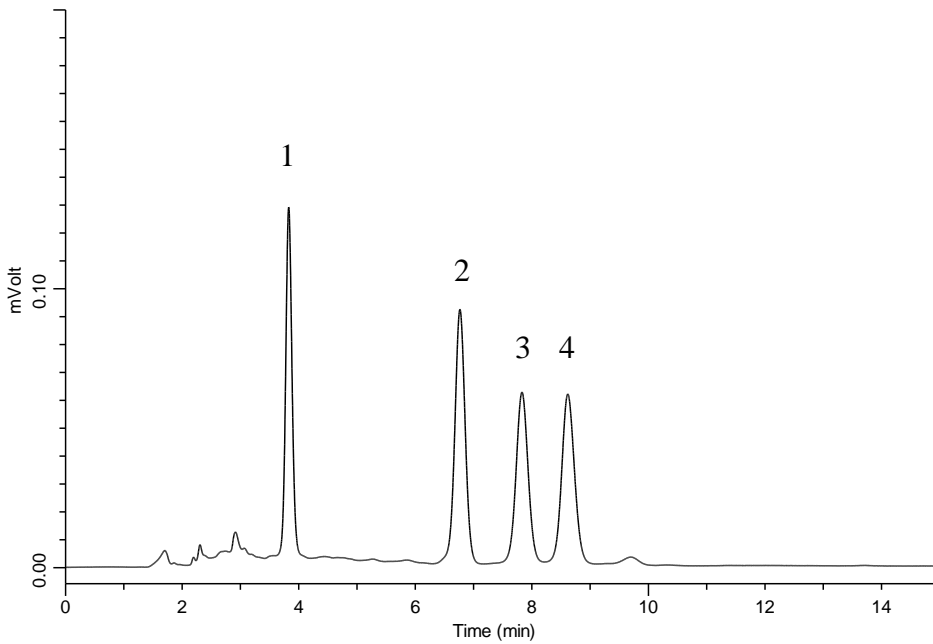

Conditions

Column : InertSustain Phenyl
 (5 μ m, 150 x 4.6 mm I.D.)
Column Cat. No. : 5020-16327
Eluent : A) CH₃OH
 B) H₂O
 A/B = 60/40, v/v
Flow Rate : 0.8 mL/min
Col. Temp. : 40 °C
Detection : UV 220 nm
Injection Vol. : 5 μ L
Sample : Standard

Analyte:

1. Estriol
 2. Estradiol
 3. Ethynylestradiol
 4. Estrone